

FABRIC CONSTRUCTION

FIBRE TYPE: E-Glass
CONSTRUCTION: 0/-45/90/+45
FABRIC WEIGHT: 1175 gsm +/- 5%

STITCHING FIBRE

STITCHING THREAD: Textured Polyester
STITCH DTex: 78
STITCH GAUGE: 6.0 gg
STITCH LENGTH: 2.5 mm
STITCH TYPE: 1/2 Pillar Tricot
STITCH WEIGHT: 7 gsm


PLY CONSTRUCTION

0°
FIBRE SPECIFICATION: E-Glass
FIBRE TEX: 1200 tex
GAUGE: 6 gg
PLY WEIGHT: 283 gsm

+45°
FIBRE SPECIFICATION: E-Glass
FIBRE TEX: 300 tex
GAUGE: 18 gg
PLY WEIGHT: 301 gsm

90°
FIBRE SPECIFICATION: E-Glass
FIBRE TEX: 600 tex
GAUGE: 12 gg
PLY WEIGHT: 283 gsm

-45°
FIBRE SPECIFICATION: E-Glass
FIBRE TEX: 300 tex
GAUGE: 18 gg
PLY WEIGHT: 301 gsm

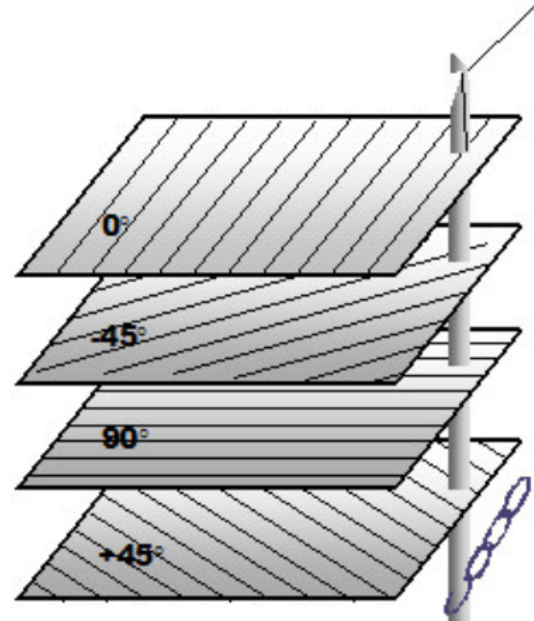

CUSTOMISATION:

CUSTOMER CODE AND DESCRIPTION: CUSTOMER SPECIFIED
FABRIC WIDTH: 1270mm (+/- 5mm) - OR TAPES ON APPLICATION
TRACER THREADS / TAPERED EDGES: CUSTOMER SPECIFIED
APPROVED FIBRES: ON APPLICATION
ROLL WEIGHT / LENGTH: CUSTOMER SPECIFIED
CARDBOARD CORE: CUSTOMER SPECIFIED
PACKAGING: CUSTOMER SPECIFIED